




Pull ring profile

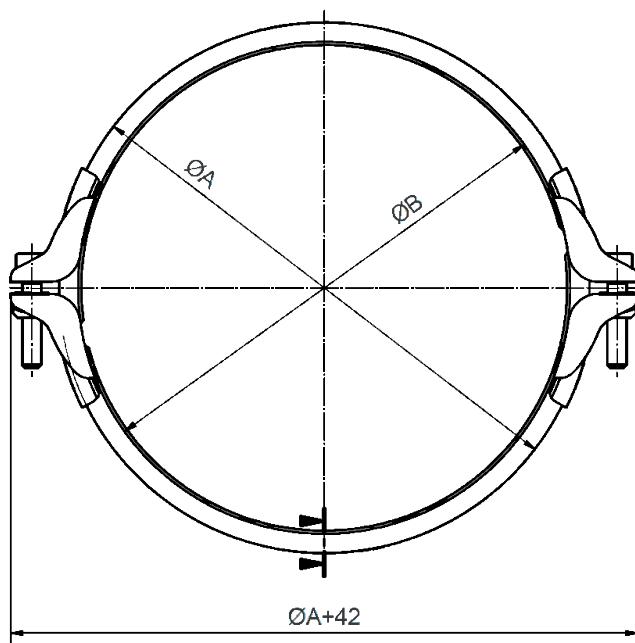

\* 2=galvanized, 3=stainless steel

Explosion pressure shock resistance (possible up to DN 315):  
required screw torque Ma = 25Nm**Pull ring for 1 and 2 mm wall thickness**

| Pipe         | Ø 60     | Ø 80     | Ø 100    | Ø 120    | Ø 140    | Ø 150    | Ø 175    | Ø 200    |
|--------------|----------|----------|----------|----------|----------|----------|----------|----------|
| Articel-no.  | 1206*383 | 1208*383 | 1210*383 | 1212*383 | 1214*383 | 1215*383 | 1217*383 | 1220*383 |
| Ø B          | 60       | 80       | 104      | 124      | 140      | 154      | 179      | 204      |
| Ø A          | 81       | 101      | 125      | 145      | 161      | 175      | 200      | 225      |
| Weight in kg | 0,3      | 0,31     | 0,33     | 0,36     | 0,37     | 0,39     | 0,42     | 0,45     |
| Pipe         | Ø 224    | Ø 250    | Ø 280    | Ø 300    | Ø 315    | Ø 350    | Ø 400    | Ø 400    |
| Articel-no.  | 1222*383 | 1225*383 | 1228*383 | 1230*383 | 1231*383 | 1235*383 | 1240*383 | 1245*383 |
| Ø B          | 224      | 254      | 281      | 304      | 316      | 354      | 404      | 450      |
| Ø A          | 245      | 275      | 302      | 325      | 337      | 375      | 425      | 478      |
| Weight in kg | 0,47     | 0,51     | 0,55     | 0,57     | 0,59     | 0,63     | 0,68     | 0,73     |
| Pipe         | Ø 500    | Ø 560    | Ø 630    | Ø        | Ø        | Ø        | Ø        | Ø        |
| Articel-no.  | 1250*383 | 1256*383 | 1263*383 | -        | -        | -        | -        | -        |
| Ø B          | 500      | 560      | 632      | -        | -        | -        | -        | -        |
| Ø A          | 524      | 586      | 656      | -        | -        | -        | -        | -        |
| Weight in kg | 0,78     | 0,83     | 0,90     | -        | -        | -        | -        | -        |

**Pull ring for 3 mm wall thickness**

| Pipe         | Ø 120    | Ø 150    | Ø 175    | Ø 200    | Ø 250    | Ø 300    | Ø 350    | Ø 400    |
|--------------|----------|----------|----------|----------|----------|----------|----------|----------|
| Articel-no.  | 1212*926 | 1215*926 | 1217*926 | 1220*926 | 1225*926 | 1230*926 | 1235*926 | 1240*926 |
| Ø B          | 126      | 156      | 181      | 206      | 256      | 306      | 356      | 406      |
| Ø A          | 151      | 181      | 206      | 231      | 281      | 331      | 381      | 431      |
| Weight in kg | 0,36     | 0,39     | 0,42     | 0,45     | 0,51     | 0,57     | 0,63     | 0,68     |

Denomination:

**Pull-rings without sealant**

Date:

03/20

Datasheet-no.

2/2

Rev.

2